

Voice/Tone Talk-2 Pager

Specifications:

Frequency:	33-49 MHz, 84-88 MHz, 143-174 MHz, 406-512 MHz
Voice Storage Time:	8 minutes
Voice Level:	93 dBA @ 12"
Power Supply:	3 – 1.2V NI-HM AAA 10 Day + (8 hour day/6-30 second messages)
Life:	
Sensitivity Alert:	4UV/M
Selectivity:	60 DB
Sensitivity:	5uV/m
Spurious Image Rejection:	55 BD
Audio Output @12" :	95/93 DBA (Audio/Voice)
Frequency Stability:	10 PPM
Dimensions:	1"(D)X2"(W)X3"(H)
Addresses:	12 Channel 8 Personal Call Addresses 4 Group Call Addresses




Part #2885 for Pager

Part #2886 for Charging Base

Special Features:

- ✓ Synthesized
- ✓ Single or Dual Channel Option
- ✓ IP 54 Specification Protection from Rain & Dust
- ✓ Wideband & Narrowband Capable
- ✓ 8 Minutes Stored Voice Memory
- ✓ 4 Position Selector Knobs
- ✓ Function Mode Announcement
- ✓ 4Programmable Tone & Vibrate Alerts
- ✓ Priority Sacn, Normal Scan, Silent Scan Functions
- ✓ User Programmable Tone for Different Addresses
- ✓ Channel Monitor Function
- ✓ Low Battery Alert
- ✓ Standard Desktop Charger Base
- ✓ Optional Amplied Charger Base
- ✓ Earphone Jack

Voice/Tone Talk-2 Pager Amplified Charger

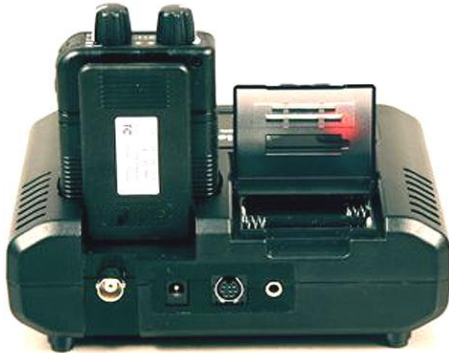

Part #2886CA



Key Specifications/Special Features:

1. Quick Charging for Talk-2 Voice Pager Amplified Charger
2. Audio Amplifier
3. External antenna is optional
4. External Speaker
5. Amplifier Relay Feature
6. Input Voltage: 110 V AC. 50 ~ 60 Hz
7. Charging Current: 400 mA (nominal)
4. Full Recharge Time: approximately 2 hours
5. Weight: 14.19 oz
6. Size: 6.69(L) x 4.86(W) x 2.17(H)inches